


# Fransgård

## T.I. 5000

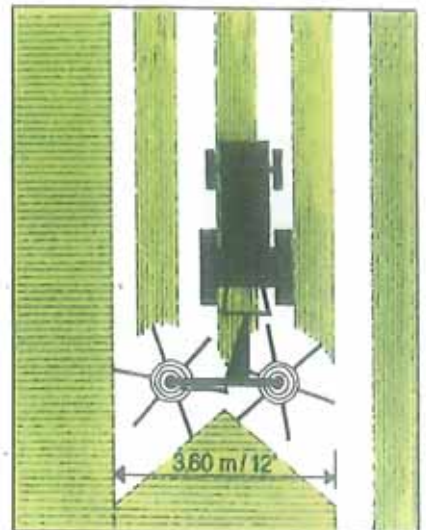


### TECHNICAL DATA:

| THE COMBI RAKE        | TI 5000                   |
|-----------------------|---------------------------|
| Working width:        | 3.40 m/11,5' - 4.20 m/14' |
| Transport width:      | 2.10 m - 7.0'             |
| Working speed:        | 10 - 15 km/h / 7-10 mph   |
| Work output:          | 3-5 ha/h / 8-13 acres/h   |
| Power requirement:    | 30 kw / 40 hp             |
| Number of arms/teeth: | 6 / 24                    |
| Tire Dimensions:      | 16.5 x 6.50 - 8 6 ply     |
| Weight:               | 450 kg / 990 lbs.         |
| Power take-off:       | 400 - 540                 |

Changing the rake arms from raking to a tedding position is a quick and easy procedure.

During the »tedding« operation the rake arms are locked and the machine is tilted forward.

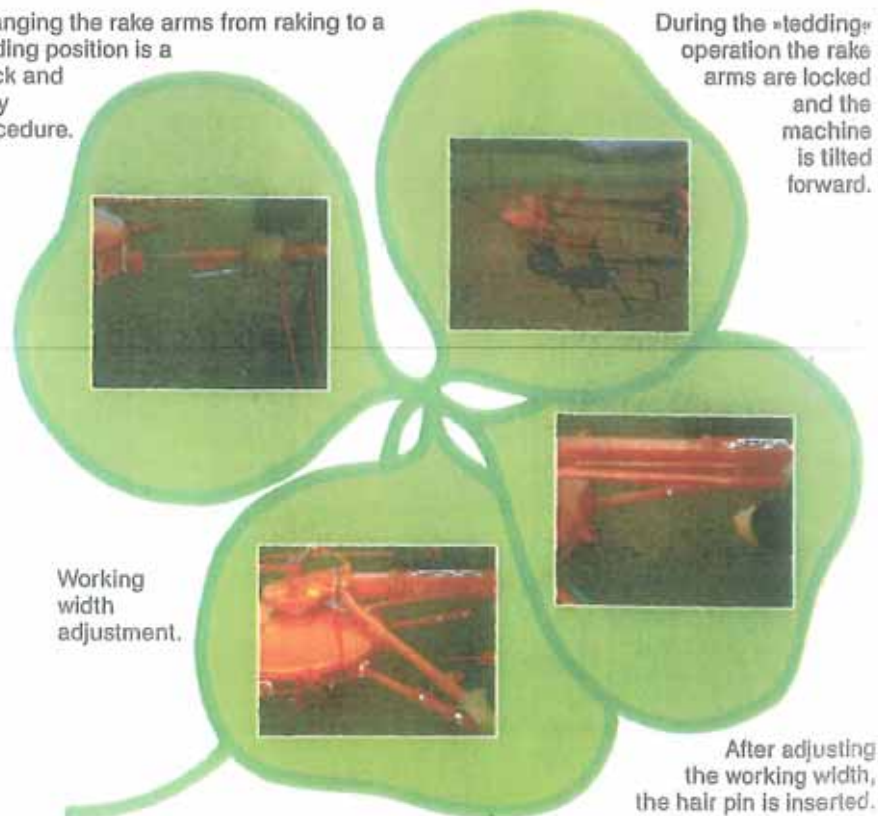

Working width adjustment.

After adjusting the working width, the hair pin is inserted.

IMPORTER:

**FARM TECH**

3 Turner Court  
WODONGA VIC 3690  
PH: 02 6024 6800  
[www.farmtech.com.au](http://www.farmtech.com.au)

DEALER

# Fransgård

Fransgård Maskinfabrik A/S  
Fredbjergvej 132 · DK-9640 Farsø  
Tel. +45 98 63 21 22 · Fax +45 98 63 18 65